
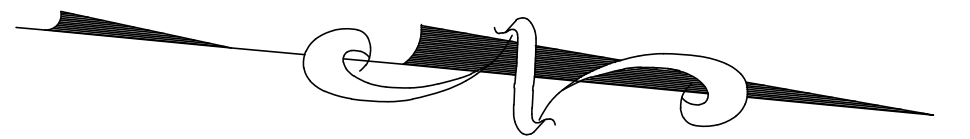


NOTES:

- EXISTING UTILITIES, STRUCTURES, TOPOGRAPHY AND PROPERTY LINE INFORMATION SHOWN HEREON ARE TAKEN FROM THE "PLOT PLAN" PREPARED FOR JEFFERY & DEBORAH HELLINGER, PREPARED BY LEONARD SURVEYORS, LLC OF WESTPORT, CT, DATED AUGUST 12, 2024, AND LAST REVISED SEPTEMBER 9, 2025.
- EXISTING INLAND WETLANDS ON-SITE WERE LOCATED BY TANA PERINI, JMM WETLAND CONSULTING SERVICE, ON AUGUST 12, 2024, AND ARE AS SHOWN ON THE ABOVE REFERENCED SURVEY.
- LOCATIONS OF EXISTING UNDERGROUND STRUCTURES AND UTILITIES INDICATED HEREON ARE TAKEN FROM DESIGN DRAWINGS, FIELD OBSERVATIONS, AND OTHER SOURCES OF INFORMATION AND ARE NOT TO BE CONSIDERED AS AN ACCURATE "AS-BUILT" SURVEY. THE CONTRACTOR SHALL EXCAVATE TEST HOLES, CONTACT "CALL BEFORE YOU DIG", AND PERFORM WHATEVER ADDITIONAL VERIFICATION NECESSARY TO VERIFY THE EXISTING INFORMATION. THE PROJECT ENGINEER SHALL BE PROMPTLY NOTIFIED OF ANY APPARENT CONFLICTS BETWEEN EXISTING UTILITIES AND PROPOSED WORK.
- THE PURPOSE OF THIS PLAN IS TO SHOW THE PROPOSED DRIVEWAY, HARDSCAPE, SITE GRADING, STORMWATER MANAGEMENT, UTILITIES, SOIL EROSION CONTROLS AND NEW SEPTIC SYSTEM ASSOCIATED WITH THE CONSTRUCTION OF A NEW ADDITION, POOL, HOUSE AND TENNIS COURT.
- ALL CONSTRUCTION SHALL CONFORM TO THE TOWN OF WESTON STANDARD DETAILS AND SPECIFICATIONS. IN THE ABSENCE OF LOCAL STANDARDS, THE WORK SHALL CONFORM TO THE REQUIREMENTS OF THE CONNECTICUT DEPARTMENT OF TRANSPORTATION SPECIFICATION FORM SIX, LATEST REVISION.
- THE EXISTING SEPTIC SYSTEM SHALL BE ABANDONED IN ACCORDANCE WITH LOCAL AND STATE HEALTH DEPARTMENT REQUIREMENTS.
- THE EXISTING WELL SHALL BE LOCATED AND EXTENDED ABOVE GRADE IN ACCORDANCE WITH LOCAL AND STATE HEALTH DEPARTMENT REQUIREMENTS.
- SOIL AND EROSION CONTROL MEASURES SHOWN HEREON SHALL BE PROPERLY INSTALLED PRIOR TO THE START OF CONSTRUCTION, INSPECTED AND REPAIRED WEEKLY AND BEFORE AND AFTER STORM EVENTS, AND MAINTAINED IN FUNCTIONAL CONDITION THROUGHOUT THE CONSTRUCTION PERIOD.
- THE STORMWATER MANAGEMENT FACILITIES SHOWN ON THIS PLAN, IF PROPERLY INSTALLED AND MAINTAINED, SHALL CONTROL THE STORMWATER RUNOFF FROM THE SITE.
- SITE GRADING INDICATED ON THIS PLAN IS IN CONFORMANCE WITH THE TOWN OF WESTON ZONING REGULATIONS.
- THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS PRIOR TO THE COMMENCEMENT OF THE WORK.
- REFER TO THE "LANDSCAPE PLAN" PREPARED BY EDGROUN DESIGN ASSOCIATES FOR ADDITIONAL INFORMATION ON EXISTING AND PROPOSED PLANTINGS AND TREE REMOVAL.
- REFER TO THE "CONSTRUCTION SEQUENCE PACKAGE" PREPARED BY THIS OFFICE FOR ADDITIONAL INFORMATION IN CONSTRUCTION PHASING.

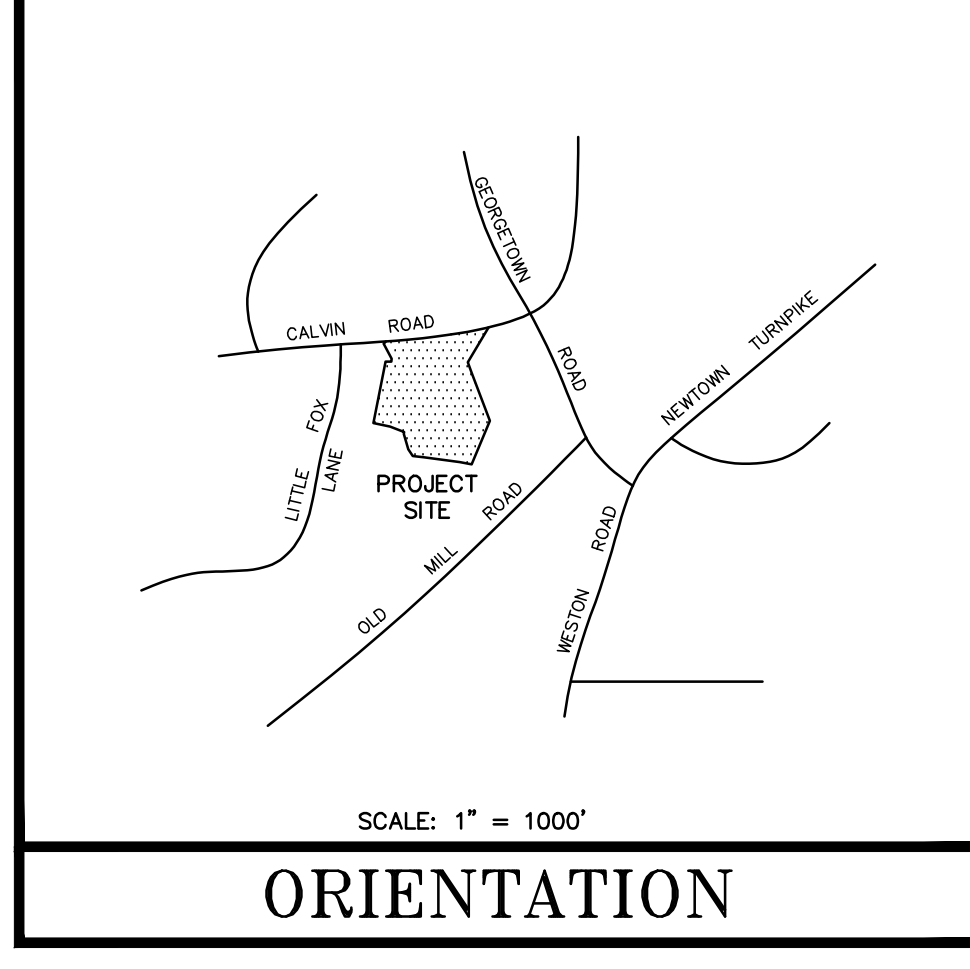

LEGEND

EXISTING	ITEM	PROPOSED
	DRAIN	
	STORM SEWER	
N.A.	DEEP TEST	
N.A.	PERCOLATION TEST	
440	CONTOUR	
× 337.9	SPOT ELEVATION	× 439.5
N.A.	SILT FENCE	
N.A.	DOUBLE SILT FENCE	
	POLE	N.A.

ELEVATIONS:

GARAGE (ADDITION)	: 222.5
BASEMENT	: 216.9
F.F. HOUSE (ADDITION)	: 225.9
EX. HOUSE SEWER OUT (INV.)	: 215.5±(V.I.F.)
HOUSE SEPTIC TANK IN (INV.)	: 214.7
HOUSE SEPTIC TANK OUT (INV.)	: 214.4
POOL HOUSE SEWER OUT (INV.)	: 225.1
POOL HOUSE SEPTIC TANK IN (INV.)	: 224.5
POOL HOUSE SEPTIC TANK OUT (INV.)	: 224.2
* 1st FIELD (INV. AT DB)	: 213.6
(GST BOTTOM)	: 212.6
2nd FIELD (INV. AT DB)	: 212.3
(GST BOTTOM)	: 211.3
* PROVIDE OVERFLOW BETWEEN FIELDS	


NOTE: DETERMINE IN THE FIELD IF PUMP CHAMBER IS REQUIRED AFTER UNCOVERING HOUSE SEWER.

AREA = 7.152 ACRES
MAP 22, BLOCK 2, LOT 11 + 18

THIS DRAWING AND DETAILS ON IT, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF THE ENGINEER AND MAY BE USED FOR THIS SPECIFIC PROJECT AND SHALL NOT BE LOANED, COPIED OR REPRODUCED WITHOUT THE WRITTEN CONSENT OF THE ENGINEER.


NO.	DATE	REVISIONS AND SUBMISSIONS
2	1-15-26	REVISED AND ISSUED FOR MUNICIPAL APPROVAL
1	11-13-25	ISSUED FOR MUNICIPAL APPROVAL

SIGNATURE: _____ DATE: _____ DRAWING NO: _____

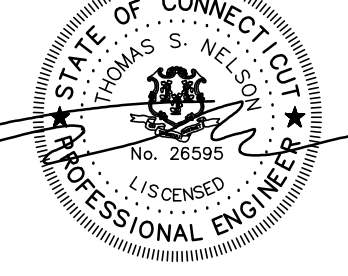

SE1

SHEET 1 OF 2

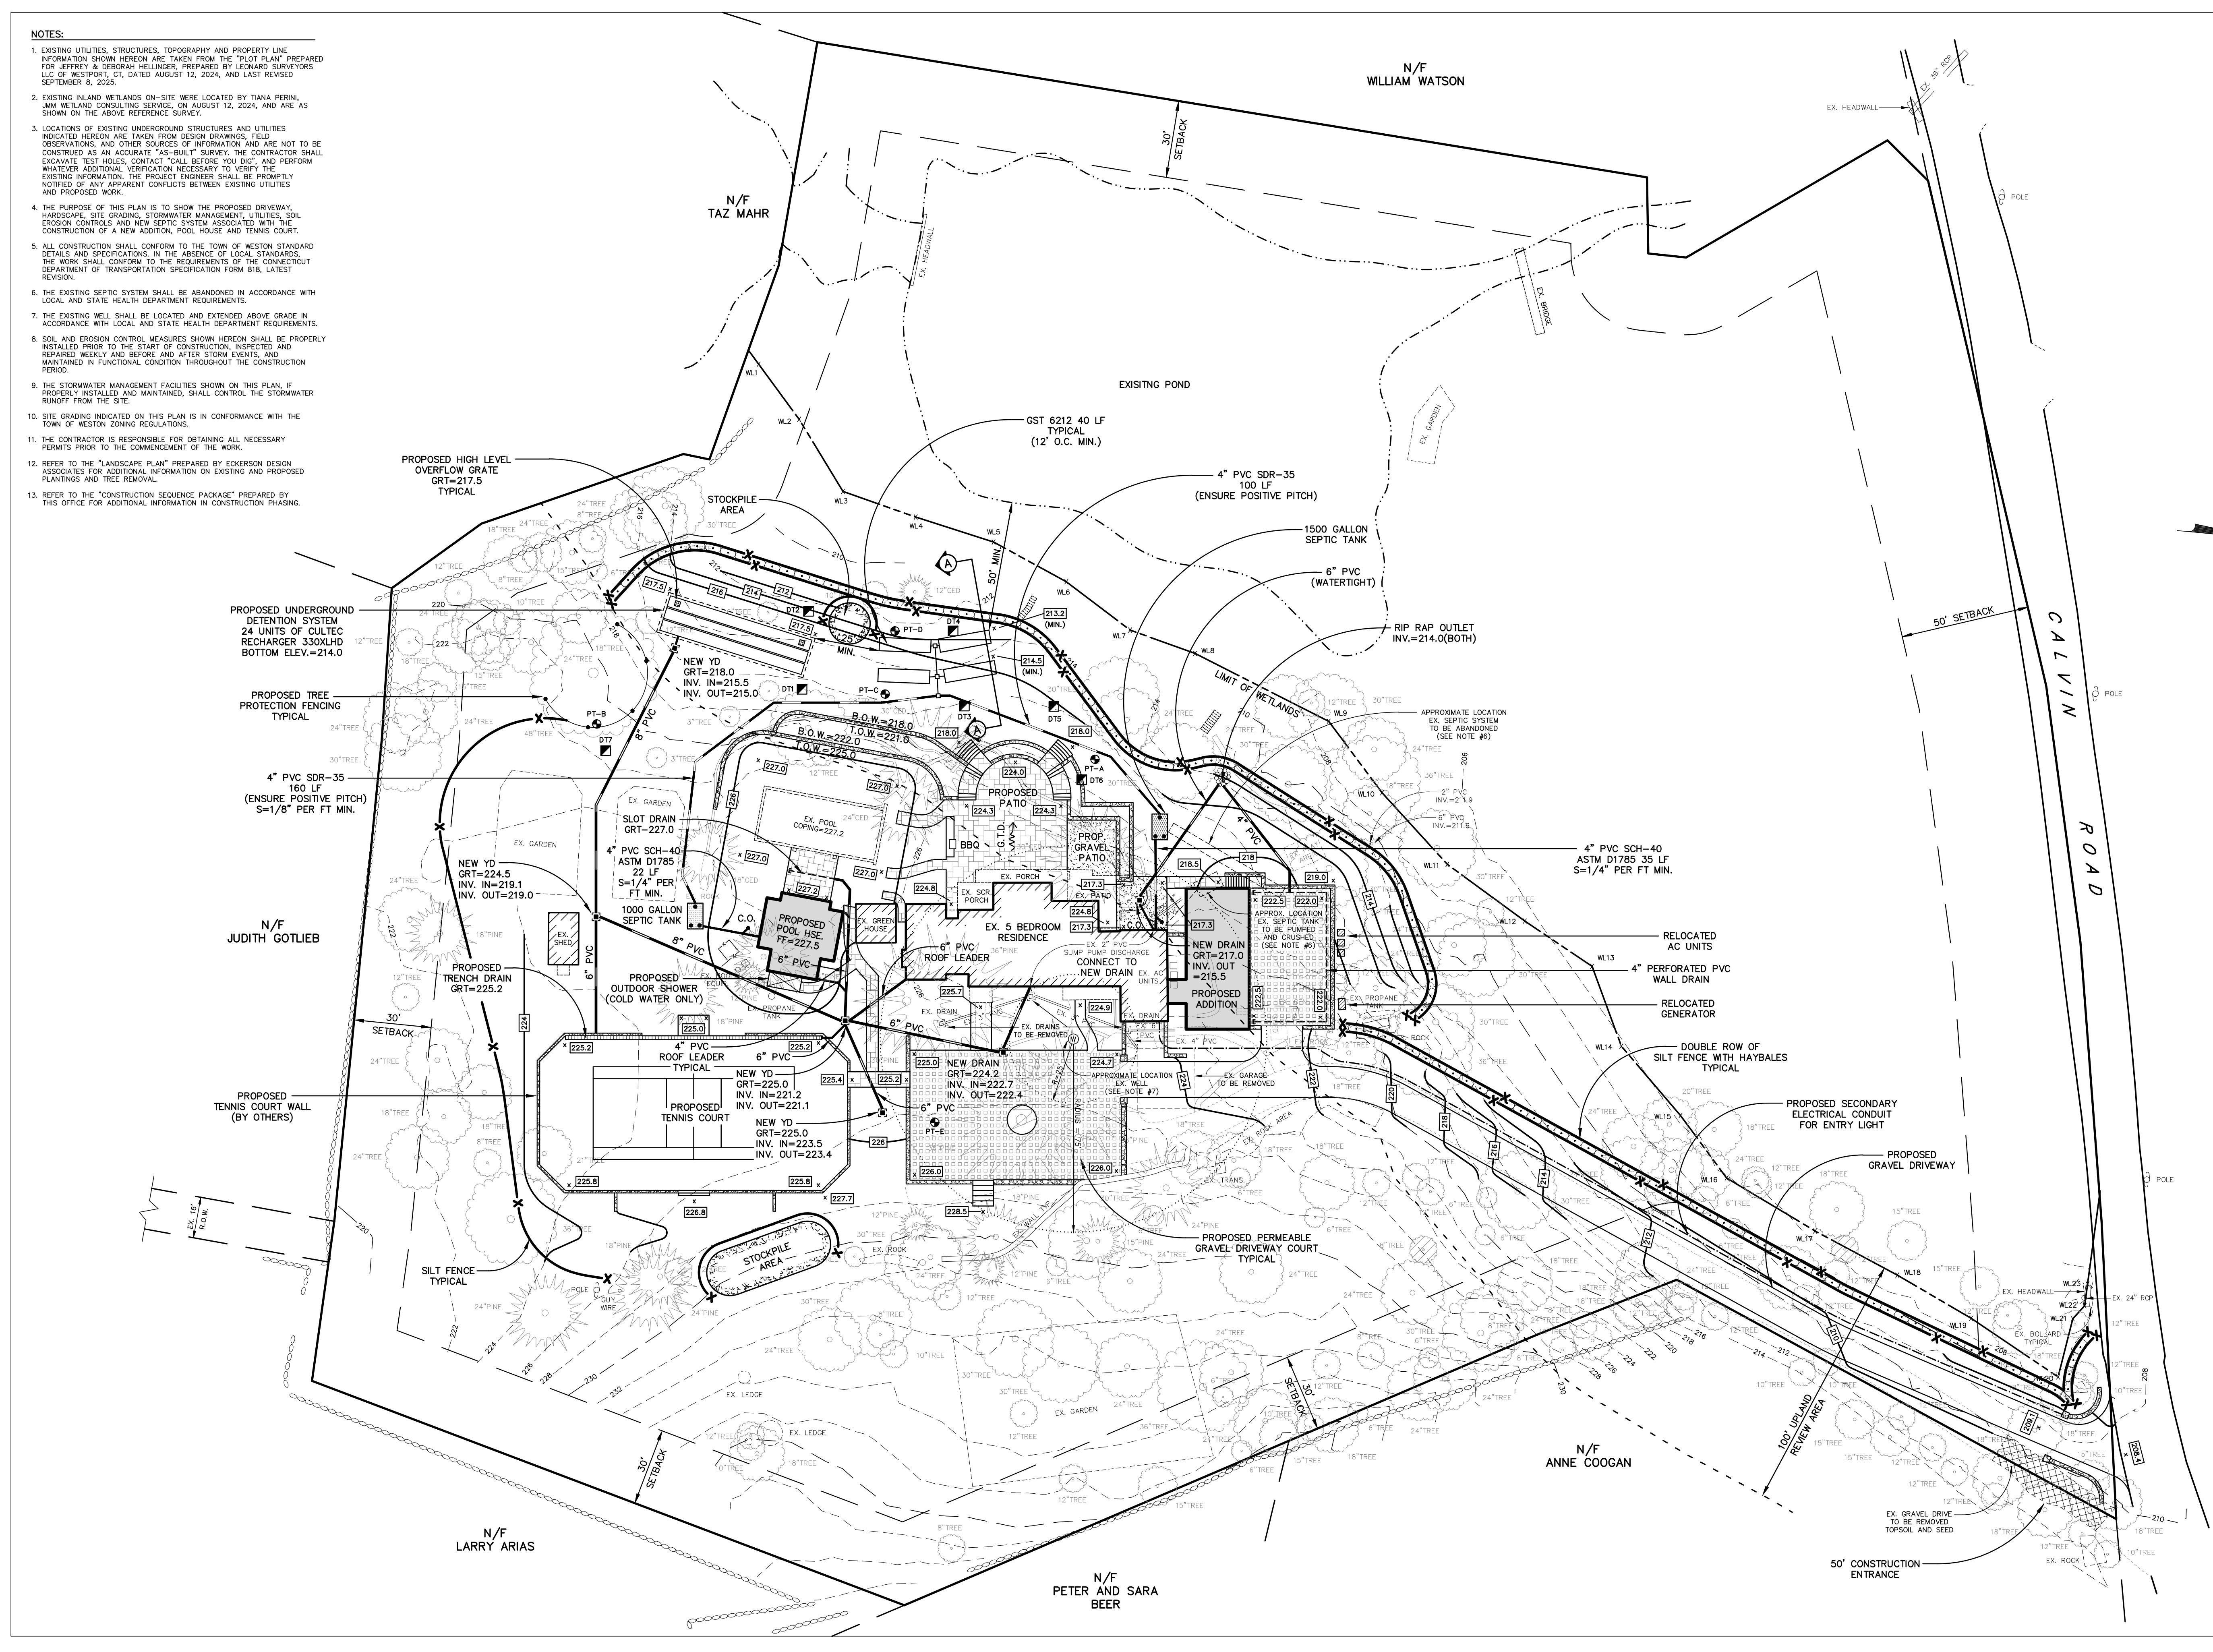


McChord Engineering Associates, Inc.
Civil Engineers and Land Planners
1 Grumman Hill Road
Wilton, CT 06897 (203) 834-0569

PLAN PREPARED FOR
JEFFERY AND DEBORAH HELLINGER
WESTON, CONNECTICUT


SEPTIC SYSTEM/SITE DEVELOPMENT PLAN
6 CALVIN ROAD
WESTON, CONNECTICUT

JOB NO: 2393A-1 DATE: NOVEMBER 13, 2025
DRAWN BY: DRS CHECKED BY: TSN, HMR
SCALE: 1" = 30'

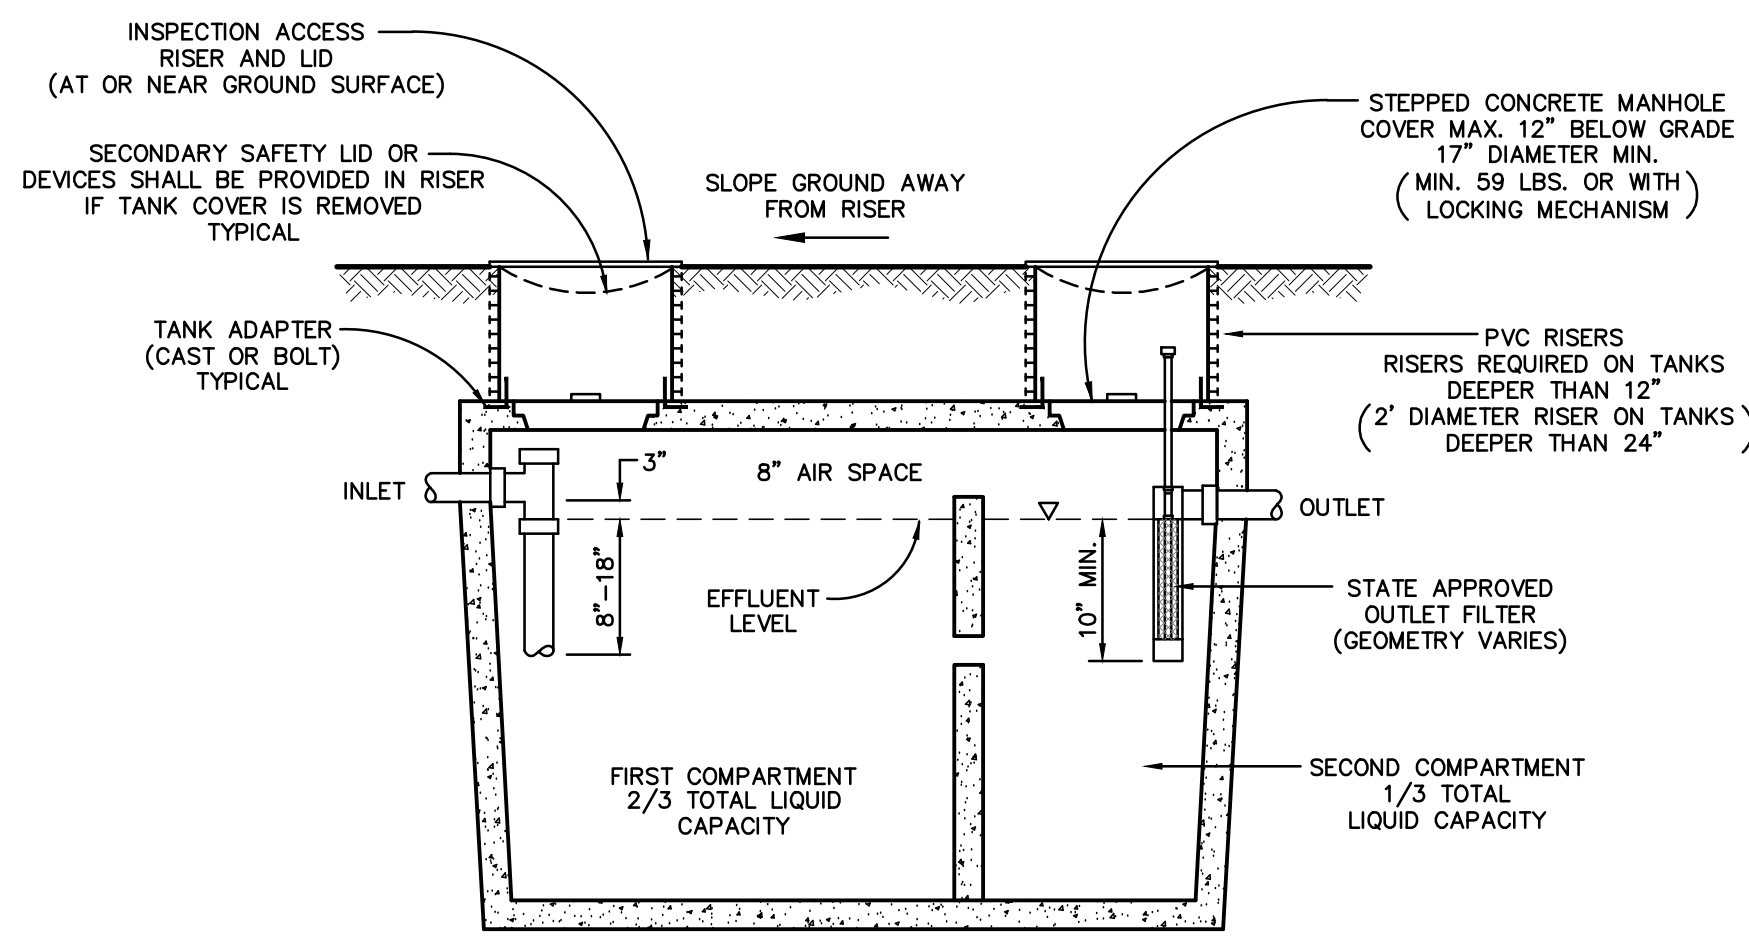


TYPICAL SEPTIC TANK DETAIL

N.T.S.

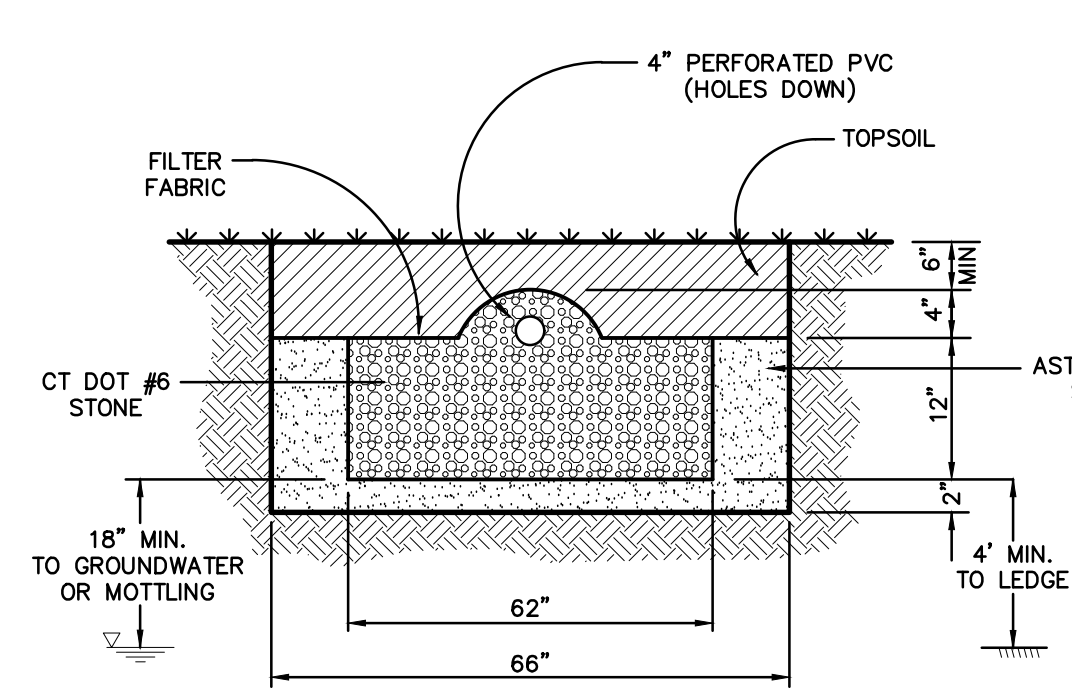


GEOMATRIX GST 6212 DETAIL

N.T.S.

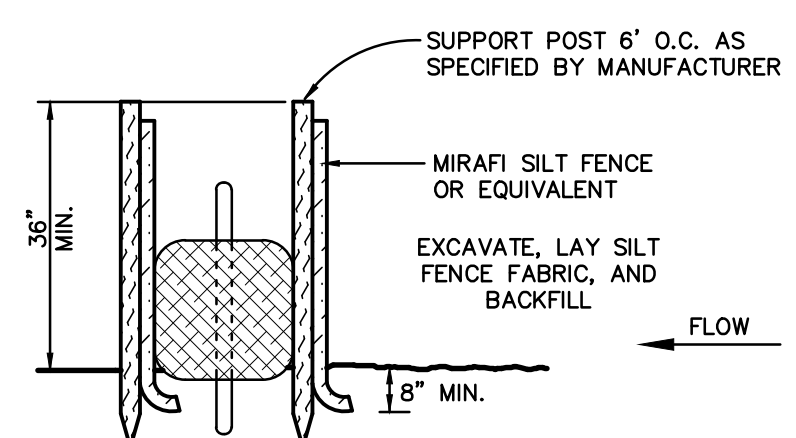

DOUBLE ROW SILT FENCE BACKED WITH STAKED HAYBALE DETAIL

N.T.S.

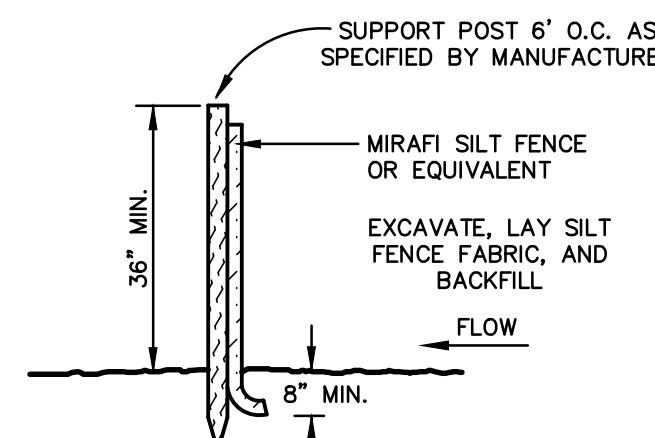

SILT FENCE DETAIL

N.T.S.

GENERAL SEDIMENT AND EROSION CONTROL NOTES:

1. SEDIMENT AND EROSION CONTROL MEASURES SHALL BE INSTALLED PRIOR TO THE START OF CONSTRUCTION.
2. COORDINATE WITH THE TOWN/CITY LAND USE STAFF PRIOR TO THE BEGINNING WORK.
3. EXISTING TREES TO BE SAVED SHALL BE PROTECTED BY FLAGGING AND/OR SNOW FENCING AT THE DRIP LINE WHICH SHALL BE MAINTAINED DURING CONSTRUCTION.
4. DUE TO THE VARIABLE LOCATION OF CONSTRUCTION, THE USE OF ANTI-TRACKING APRONS WILL BE ON A "AS-NEEDED" BASIS DETERMINED IN THE FIELD. WHEN ANTI-TRACKING APRONS ARE USED, THEY SHALL BE MAINTAINED THROUGHOUT CONSTRUCTION. APRONS SHALL CONSIST OF 2" x 4" CRUSHED STONE WITH A MINIMUM THICKNESS OF 8 INCHES. EACH APRON SHALL BE APPROXIMATELY 25 FEET LONG AND EXTEND THE WIDTH OF THE CONSTRUCTION ACCESS.
5. SILT FENCE AND OTHER SEDIMENT CONTROL MEASURES MUST BE INSTALLED IN ACCORDANCE WITH THE DRAWINGS AND SPECIFIC MANUFACTURER'S RECOMMENDATIONS.
6. SILT FENCE SHALL BE MIRAFI IMPROVENCE OR EQUIVALENT APPROVED BY THE DESIGN ENGINEER.
7. ADDITIONAL SEDIMENT AND EROSION CONTROLS MAY BE INSTALLED DURING THE CONSTRUCTION PERIOD IF FOUND NECESSARY BY THE INSPECTING ENGINEER OR ANY GOVERNING AGENCY.
8. AFTER EACH STORM EVENT OR AT LEAST ONCE WEEKLY, ALL SEDIMENT AND EROSION CONTROLS WILL BE INSPECTED. CORRECTIVE MEASURES TO MITIGATE ENVIRONMENTAL CONCERNS WILL BE ORDERED BY THE DESIGN ENGINEER AND/OR GOVERNING AGENCY, IF REQUIRED.
9. ALL PERMANENT AND TEMPORARY SEDIMENT CONTROL MEASURES WILL BE MAINTAINED IN EFFECTIVE CONDITION THROUGHOUT THE CONSTRUCTION PERIOD. UPON COMPLETION OF WORK, ALL TEMPORARY SEDIMENT CONTROL DEVICES SHALL BE REMOVED FROM THE SITE AND ANY COLLECTED SEDIMENTS FROM THE DEVICES SHALL BE DISPOSED OF LEGALLY AND IN KEEPING WITH THE INTENT OF THIS PLAN.
10. LAND DISTURBANCE SHALL BE KEPT TO A MINIMUM. ALL DISTURBED AREAS SHALL BE SEEDED AND MULCHED. APPLY GRASS SEED AT A RATE OF APPROXIMATELY 120 LBS./ACRE. SEED MIX WILL VARY FROM UPLAND TO WETLAND BUFFER AREAS. MULCH AFTER SEEDING AT A RATIO OF 1000 LBS./ACRE.
11. EFFECTED PORTIONS OF OFFSITE ROADS MUST BE SWEEP CLEAN WHEN REQUIRED.
12. ALL EROSION AND SEDIMENTATION CONTROL MEASURES WILL BE CONSTRUCTED IN ACCORDANCE WITH THE STANDARDS AND SPECIFICATIONS OF THE "CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL," DATED MARCH 30, 2024.


DESIGN CRITERIA:

1. PERCOLATION RATE: PT-C, PT-D = 1:10
 - A. DESIGN RATE FOR PRIMARY SYSTEM: 1:10
 - B. DESIGN RATE FOR RESERVE SYSTEM: N/A
2. MINIMUM LEACHING SYSTEM SPREAD (MLSS):
 - A. HYDRAULIC FACTOR (HF)
 - 1) HYDRAULIC GRADIENT = 10.3%
 - 2) DEPTH OF RESTRICTIVE LAYER = 43.75" (AVERAGE DT1 THRU 4)
 - 3) HYDRAULIC FACTOR = 16'
 - B. FLOW FACTOR (FF): EX. 5 BEDROOM RESIDENCE + POOL HOUSE = 2.0 + 0.5 = 2.5
 - C. PERCOLATION FACTOR (PF): 1:10 = 1.0
 - D. MINIMUM LEACHING SYSTEM SPREAD = 16' x 2.5 x 1.0 = 40'
 - E. LEACHING SYSTEM SPREAD PROVIDED = 40'
3. SYSTEM DESCRIPTION:
 - A. NUMBER OF BEDROOMS: EX. 5 BEDROOM RESIDENCE + POOL HOUSE = 660 + 137.5 = 797.5
 - B. REQUIRED LEACHING AREA: 797.5 SF @ 10.0 SF/LF = 79.75 LF
 - C. SYSTEM COMPONENTS: 1500 GALLON SEPTIC TANK FOR HOUSE, 1000 GALLON SEPTIC TANK FOR POOL HOUSE AND 80 LF OF GST 6212.
4. TOTAL FIELDS PROPOSED:
 - 1) PRIMARY SYSTEM: 2 x 40 LF = 80 LF @ 10.0 SF/LF = 800 SF
 - 2) RESERVE SYSTEM: N/A
5. DEPTH OF SYSTEM CONTROL: RESTRICTIVE LAYER @ 48" IN DEEP TEST 4 WILL CONTROL THE DEPTH OF THE SYSTEM.

DEEP TEST AND PERCOLATION TEST DATA:


DEEP TEST 1	DEEP TEST 2	DEEP TEST 3	DEEP TEST 4
0"-10" TOPSOIL 10"-33" RED BROWN SILTY LOAM 33"-63" HARDPAN NO MOTTLING NO GROUNDWATER NO LEDGE RESTRICTIVE @ 33"	0"-8" TOPSOIL 8"-24" RED BROWN SILTY LOAM 24"-57" HARDPAN NO MOTTLING NO GROUNDWATER NO LEDGE RESTRICTIVE @ 24"	0"-18" TOPSOIL 18"-70" RED BROWN SILTY LOAM 70"-64" HARDPAN NO MOTTLING NO GROUNDWATER NO LEDGE RESTRICTIVE @ 64"	0"-18" TOPSOIL 18"-48 RED BROWN SILTY LOAM 48"-64" HARDPAN NO MOTTLING NO GROUNDWATER NO LEDGE RESTRICTIVE @ 48"
0"-11" TOPSOIL 11"-29" RED BROWN SILTY LOAM 29"-58" HARDPAN NO MOTTLING NO GROUNDWATER NO LEDGE RESTRICTIVE @ 29"	0"-14" TOPSOIL 14"-44" RED BROWN SILTY LOAM 44"-64" HARDPAN NO MOTTLING NO GROUNDWATER NO LEDGE RESTRICTIVE @ 44"	0"-12" TOPSOIL 12"-36" RED BROWN SILTY LOAM 36"-60" MODERATELY COMPACT MANDY SILTY LOAM NO MOTTLING NO GROUNDWATER NO LEDGE NO RESTRICTIVE	PERCOLATION TEST A DEPTH: 24" DIAMETER: 8" PRESOAK: 1 HOUR TIME DEPTH DROP 11:40 10 3/4" 5/8" 11:50 11 3/8" 5/8" 12:00 11 7/8" 1/2" 12:10 12 1/4" 3/8" 12:20 12 5/8" 3/8" 12:30 13 3/8" 3/8" 12:40 13 3/8" 3/8"
PERCOLATION TEST B DEPTH: 20" DIAMETER: 8" PRESOAK: 1 HOUR TIME DEPTH DROP 12:05 11 1/2" - 12:15 14 3/4" 3 1/4" 12:25 16 1/4" 1 1/2" 12:35 19 1/4" 1 1/2" 12:45 18 1/8" 7/8" 12:55 19 7/8" 3/4" 1:05 19 1/2" 5/8"	PERCOLATION TEST C DEPTH: 20" DIAMETER: 8" PRESOAK: 1 HOUR TIME DEPTH DROP 12:08 7 7/8" - 12:18 9 1/2" 1 5/8" 12:28 11" 1 1/2" 12:38 12 1/4" 1 1/4" 12:48 13 1/2" 1 1/4" 12:58 14 1/2" 1" 1:08 15 1/2" 1"	PERCOLATION TEST D DEPTH: 20 1/2" DIAMETER: 8" PRESOAK: 1 HOUR TIME DEPTH DROP 12:13 11 1/4" - 12:23 13 1/2" 8 1/4" 12:33 DRY 1" 12:43 16 1/4" REFILL 12:53 18" 1 1/2" 1:03 18" 2 1/2" 1:13 19 1/2" 1 1/2"	PERCOLATION TEST E DEPTH: 24" DIAMETER: 8" PRESOAK: 1 HOUR TIME DEPTH DROP 2:05 11" - 2:15 13 1/2" 2 1/4" 2:25 15 7/8" 1 3/4" 2:35 16 3/8" 1 1/8" 2:45 17 1/2" 1 1/8" 2:55 18 1/2" 1" 3:05 19 1/2" 1"
DESIGN RATE: 1:20	DESIGN RATE: 1:10	DESIGN RATE: 1:20	DESIGN RATE: 1:10

NOTE: ALL DEEP AND PERCOLATION TESTS WERE PERFORMED BY MCHORD ENGINEERING ASSOCIATES, INC. ON JUNE 18, 2025. ALL DEEP TESTS WERE WITNESSED BY THE ASPETUCK HEALTH DISTRICT.

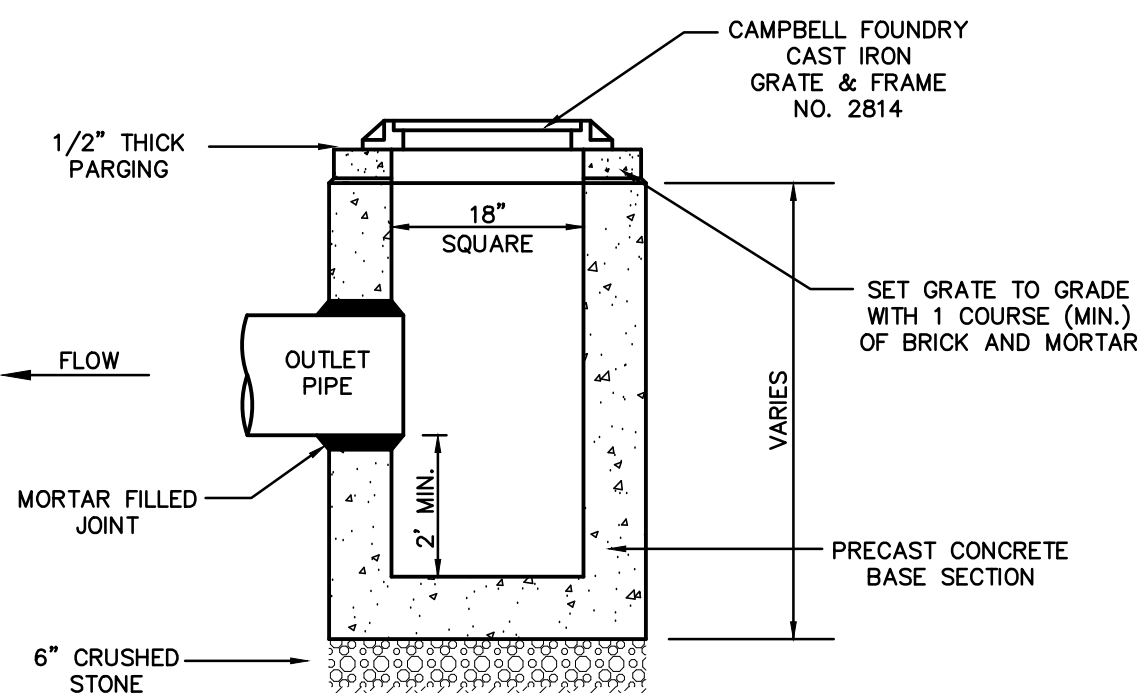


YARD DRAIN DETAIL

N.T.S.

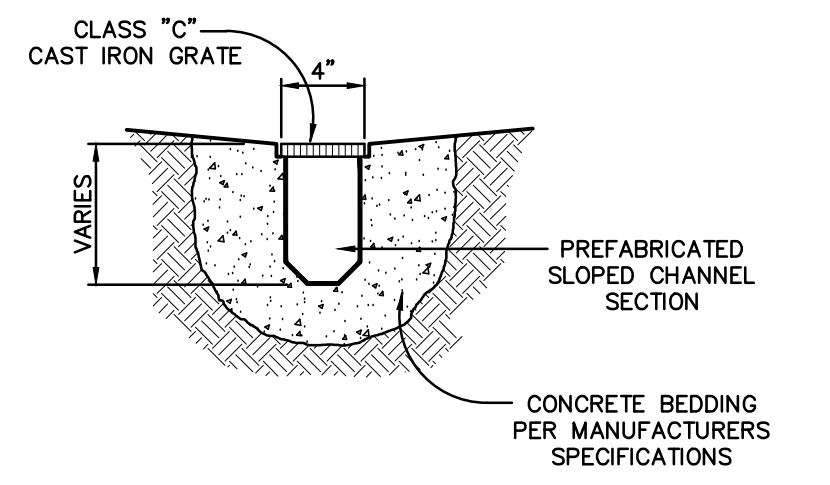


TRENCH DRAIN CROSS SECTION

N.T.S.

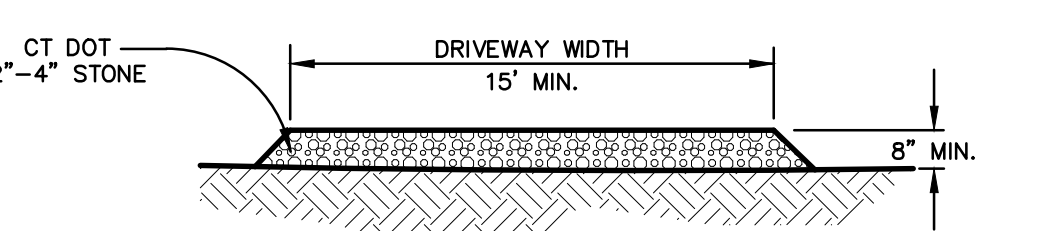

CONSTRUCTION ENTRANCE DETAIL


N.T.S.

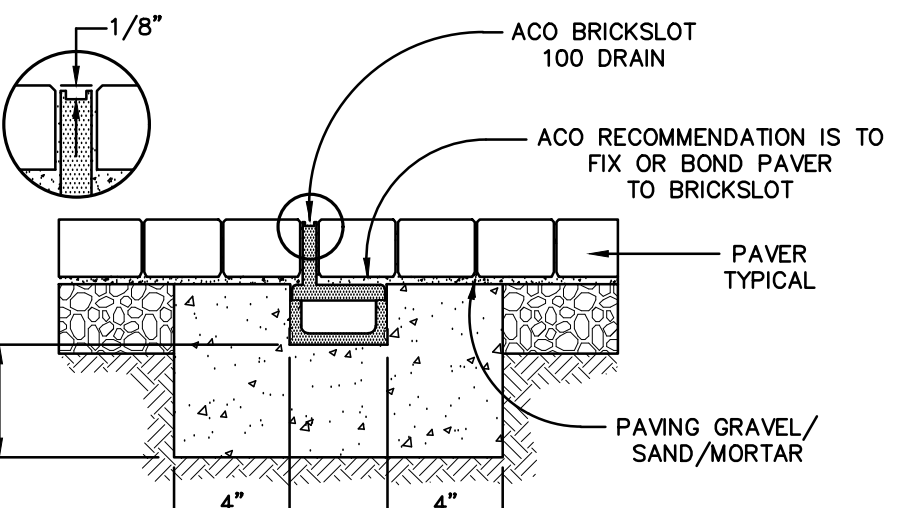

SLOT DRAIN DETAIL


N.T.S.

NOTE: REFER TO MANUFACTURER SPECIFICATIONS FOR ADDITIONAL INFORMATION.

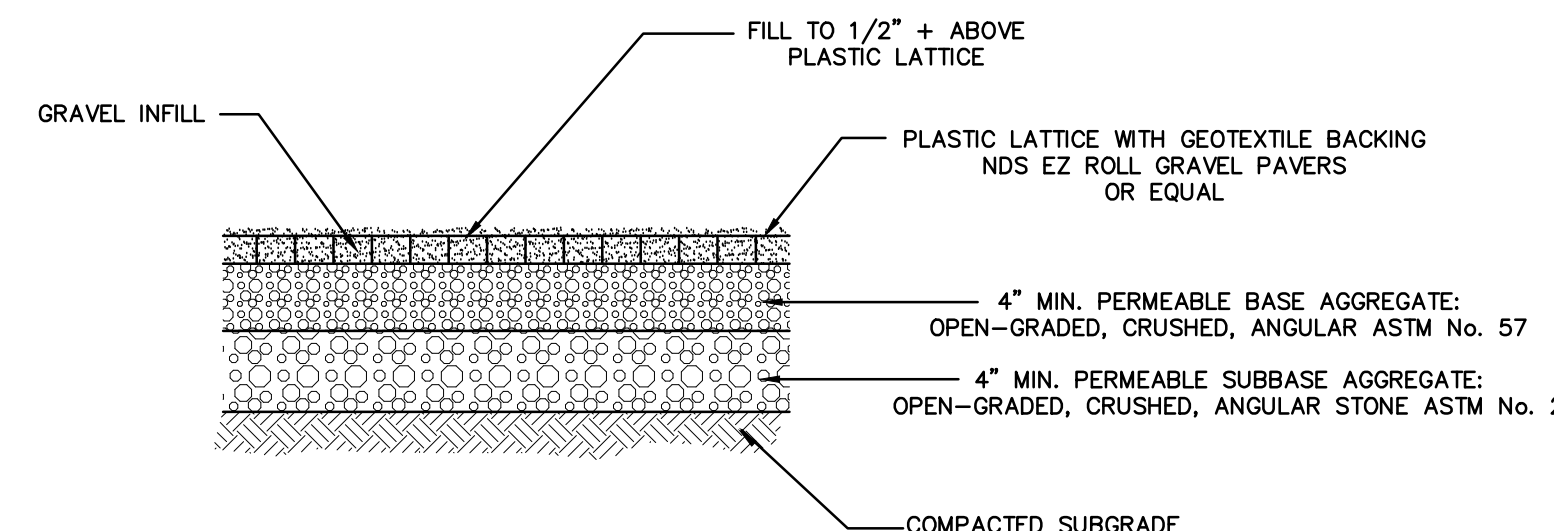

PERMEABLE GRAVEL DRIVEWAY DETAIL

N.T.S.

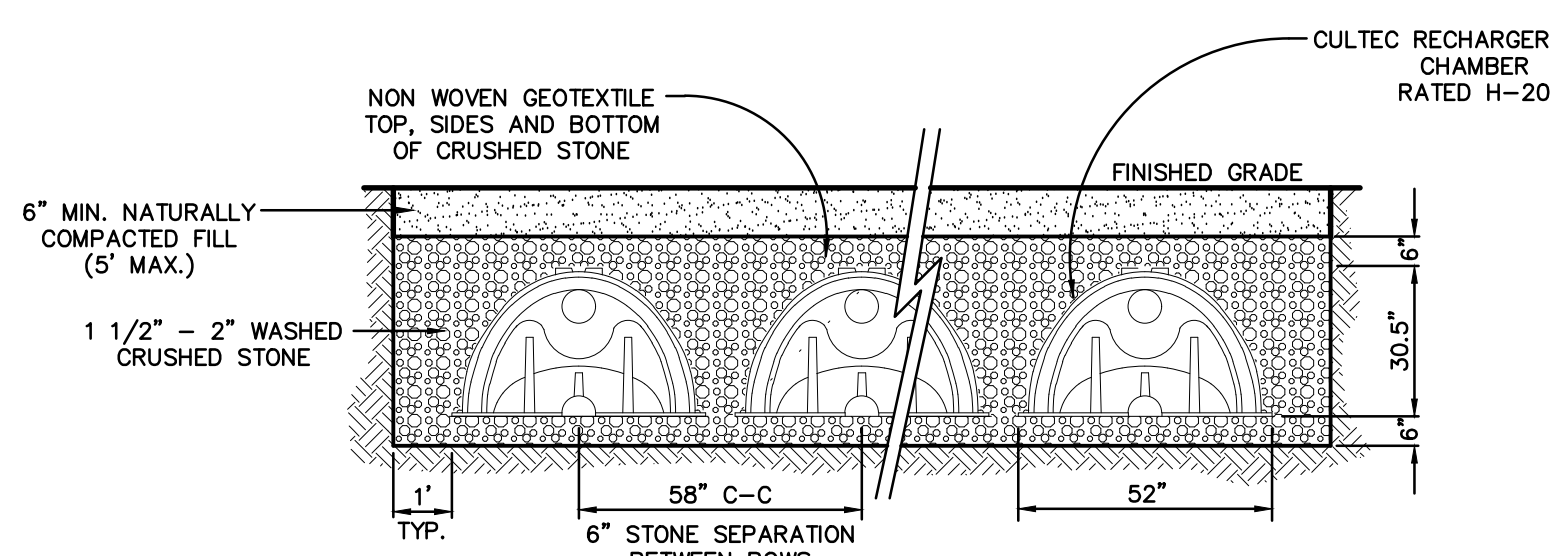

CULTEC RECHARGER 330XLH HEAVY DUTY CHAMBER SYSTEM


N.T.S.

CONSTRUCTION NOTES:

1. SUBSURFACE SEWAGE DISPOSAL SYSTEM MATERIALS AND CONSTRUCTION TECHNIQUES SHALL CONFORM TO THE STATE OF CONNECTICUT AND LOCAL HEALTH CODE STANDARDS AND SPECIFICATIONS, AS WELL AS ACCEPTED STANDARDS OF GOOD WORKMANSHIP.
2. FINAL INSPECTION AND AS-BUILT DRAWINGS SHALL BE MADE IN ACCORDANCE WITH STATE AND LOCAL CODES. THE DESIGN ENGINEER SHALL BE NOTIFIED AT LEAST 24 HOURS IN ADVANCE OF SYSTEM COMPLETION. INSPECTION OF THE SYSTEM SHALL OCCUR AS SOON AS POSSIBLE TO PREVENT DAMAGE AND IT SHALL BE COVERED WITHIN TWO WORKING DAYS OF THE SANITARIAN'S INSPECTION.
3. THE WASTE LINE FROM THE HOUSE/BUILDING TO THE SEPTIC TANK SHALL BE NO LESS THAN 4" DIAMETER CAST IRON PIPE (ASTM A-74) OR A PVC SCHEDULE 40 (ASTM D1785), WITH RUBBER COMPRESSION GASKETS OR SOLVENT WELD JOINTS AND SHALL BE PITCHED WITH A MINIMUM SLOPE OF 1/4" PER FOOT.
4. ALL SOLID DISTRIBUTION PIPING SHALL BE TIGHT JOINT 4" DIAMETER PVC (ASTM D3034 SDR 35). THESE LINES SHALL LIE ON UNDISTURBED OR COMPACTED SOIL.
5. THE SEPTIC TANK SHALL HAVE A MINIMUM CAPACITY OF 1000/1500 GALLONS AND CONTAIN TWO COMPARTMENTS. THE TANK SHALL BE INSTALLED LEVEL AND BE SET UPON AT LEAST 6" OF CRUSHED STONE OR GRAVEL, AND BE EQUIPPED WITH A 30" RISER SECTION TO GRADE. FOR ACCESS, SEPTIC TANKS INDICATED ARE MANUFACTURED BY RICHARD SEPTIC SYSTEMS, INC. OF TORRINGTON, CT. AN EQUIVALENT TANK IS ACCEPTABLE.
6. DISTRIBUTION BOXES ARE MODEL DB 4 AS MANUFACTURED BY RICHARD SEPTIC SYSTEMS, INC. OF TORRINGTON, CONNECTICUT. BOXES SHALL BE SET UPON AT LEAST 6" OF CRUSHED STONE OR GRAVEL. EQUIVALENT BOXES ARE ACCEPTABLE.
7. THE CONTRACTOR SHALL REMOVE FROM THE AREA OF THE SEPTIC SYSTEM ALL TOPSOIL AND ALL OTHER ORGANIC MATERIALS, TREE TRUNKS, AND DEBRIS; AND SHALL SCARIFY AND RAKE THE EXPOSED SURFACE TO ENSURE A GOOD BOND BETWEEN THE EXISTING SUBSOIL AND THE SELECT FILL.
8. SELECT FILL SHALL MEET CONNECTICUT DEPARTMENT OF TRANSPORTATION SPECIFICATION M.02.06-1B AS FOLLOWS:

SIEVE	% PASSING
#4	100
#10	70-100
#20	10-50*
#40	0-5
#100	0-2.5

* PERCENT PASSING THE #100 SIEVE CAN BE INCREASED TO NO GREATER THAN 75% IF THE PERCENT PASSING THE #40 SIEVE DOES NOT EXCEED 10% AND #200 SIEVE DOES NOT EXCEED 5%.
9. THE FILL SHALL ALSO BE ACCEPTABLE TO THE LOCAL HEALTH DEPARTMENT.
10. THE FIRST 6" OF SELECT FILL SHALL BE HARROWED INTO THE EXISTING SOIL. THEREAFTER, IT SHALL BE PLACED IN 12" LIFTS AND MECHANICALLY COMPACTED. COMPACTION SHALL BE AT LEAST 90%-95% OF THAT DETERMINED BY A MODIFIED OPTIMUM COMPACTION TEST PERFORMED IN ACCORDANCE WITH ASTM D1557. SELECT FILL SHALL BE PLACED TO A POINT AT LEAST 5' FROM THE EDGE OF THE TRENCH, AND COMMON FILL TO A POINT 10' FROM THE EDGE OF THE TRENCH. IN CASES WHERE THE DEPTH OF FILL EXCEEDS 12" ABOVE THE EXISTING GRADE, THE TRENCH SHALL BE NOTCHED INTO THE EXISTING SOIL AT LEAST 12" AND FILLED WITH SELECT FILL.
11. FINAL GRADING, INCLUDING THE 6" TOPSOIL LAYER, SHALL BE COMPLETED AS SOON AS POSSIBLE AFTER FINAL INSPECTION. CARE SHALL BE TAKEN TO PREVENT THE PONDING OF SURFACE WATER ON OR NEAR ANY PART OF THE SYSTEM.
12. PROPOSED SEPTIC SYSTEM LOCATIONS MAY NOT BE SHIFTED WITHOUT OBTAINING WRITTEN PERMISSION FROM THE DESIGN ENGINEER AND LOCAL SANITARIAN.
13. NO PART OF THE SEPTIC TANK OR LEACHING TRENCHES SHALL BE WITHIN 75' OF ANY WELL. THERE IS NO APPARENT INTERFERENCE BETWEEN THE WELLS OR SEPTIC SYSTEMS ON ADJACENT PROPERTIES AND THOSE PROPOSED ON THIS PLAN.
14. SURFACE AND GROUNDWATER DRAINS SHALL BE PLACED UP GRADIENT AND AT LEAST 25' FROM THE SEPTIC SYSTEM. WHEN DRAINS ARE REQUIRED TO BE DOWN GRADIENT, THEY MUST BE AT LEAST 50' FROM THE SEPTIC SYSTEM. ALL DRAINS AND ROOF LEADERS SHALL DISCHARGE AWAY FROM THE SEPTIC SYSTEM.
15. SOIL AND EROSION CONTROL MEASURES SHALL BE INSTALLED AS INDICATED ON THE PLAN AND MAINTAINED DURING CONSTRUCTION, UNTIL THE SITE IS STABILIZED.
16. THIS DESIGN IS BASED UPON THE USE OF CONVENTIONAL BATHTUBS WITH A CAPACITY UNDER 100 GALLONS. IF A LARGER BATH/HOT TUB IS TO BE INSTALLED THE LEACHING AREA AND SEPTIC TANK SIZES MUST BE INCREASED TO COMPLY WITH SECTION VII.F OF THE TECHNICAL STANDARDS. ADDITIONALLY, THE SYSTEM HAS NOT BEEN DESIGNED TO ACCEPT EFFLUENT FROM WHIRLPOOL BACKWASH, WATER SOFTENER BACKWASH OR GARBAGE DISPOSALS.
17. THIS DESIGN CONFORMS TO APPLICABLE CODES AND ACCEPTED PRACTICE. NO OTHER WARRANTY IS EXPRESSED OR IMPLIED.
18. MCHORD ENGINEERING ASSOCIATES, INC. ASSUMES NO RESPONSIBILITY FOR SEPTIC SYSTEM SITE PREPARATION, LOCATION, OR INVERT ELEVATIONS IN COMPLIANCE WITH THE APPROVED PLAN, UNLESS IT SUPERVISES EACH PHASE OF SYSTEM INSTALLATION.
19. PRIOR TO CONSTRUCTION A SURVEYOR LICENSED IN THE STATE OF CONNECTICUT SHALL STAKE OUT THE PROPOSED SEPTIC SYSTEM AND PROVIDE BENCHMARK ELEVATIONS.

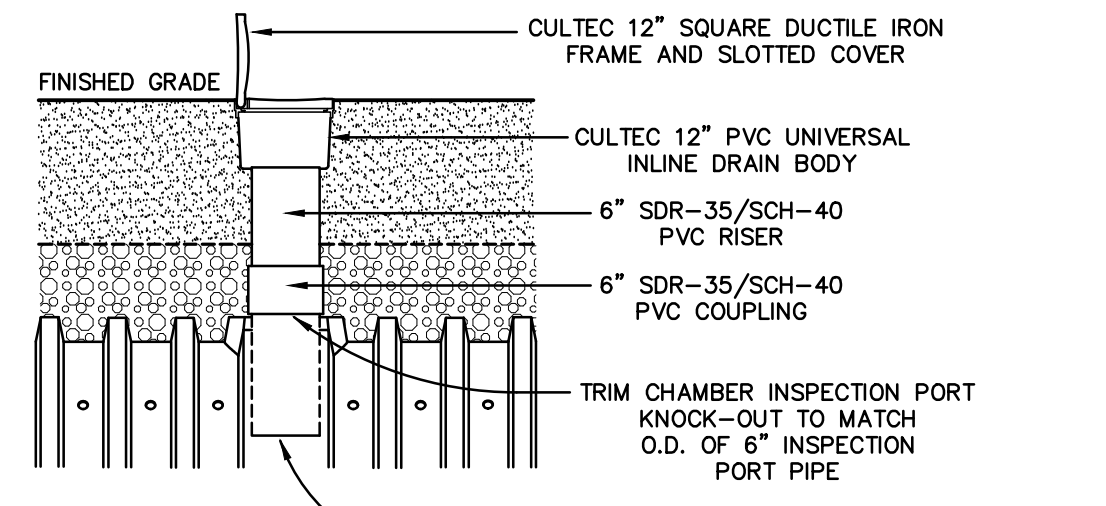

CULTEC OVERFLOW GRATE DETAIL

N.T.S.

THIS DRAWING AND DETAILS ON IT, AS AN INSTRUMENT OF SERVICE, IS THE PROPERTY OF THE ENGINEER AND MAY BE USED FOR THIS SPECIFIC PROJECT AND SHALL NOT BE LOANED, COPIED OR REPRODUCED WITHOUT THE WRITTEN CONSENT OF THE ENGINEER.

NO.	DATE	REVISIONS AND SUBMISSIONS
2	1-15-26	REVISED AND ISSUED FOR MUNICIPAL APPROVAL
1	11-13-25	ISSUED FOR MUNICIPAL APPROVAL

SIGNATURE: _____ DRAWING NO: _____

McChord Engineering Associates, Inc.
Civil Engineers and Land Planners
1 Grumman Hill Road
Wilton, CT 06897 (203) 834-0569

PLAN PREPARED FOR
JEFFERY AND DEBORAH HELLINGER
WESTON, CONNECTICUT

CONSTRUCTION NOTES AND DETAILS
6 CALVIN ROAD
WESTON, CONNECTICUT

JOB NO: 2393A-1 DATE: NOVEMBER 13, 2025
DRAWN BY: DRS CHECKED BY: TSN, HMR
SCALE: AS SHOWN

STATE OF CONNECTICUT
REGISTERED PROFESSIONAL ENGINEER
No. 26595
EXPIRES 12/31/2028

SE2

SHEET 2 OF 2